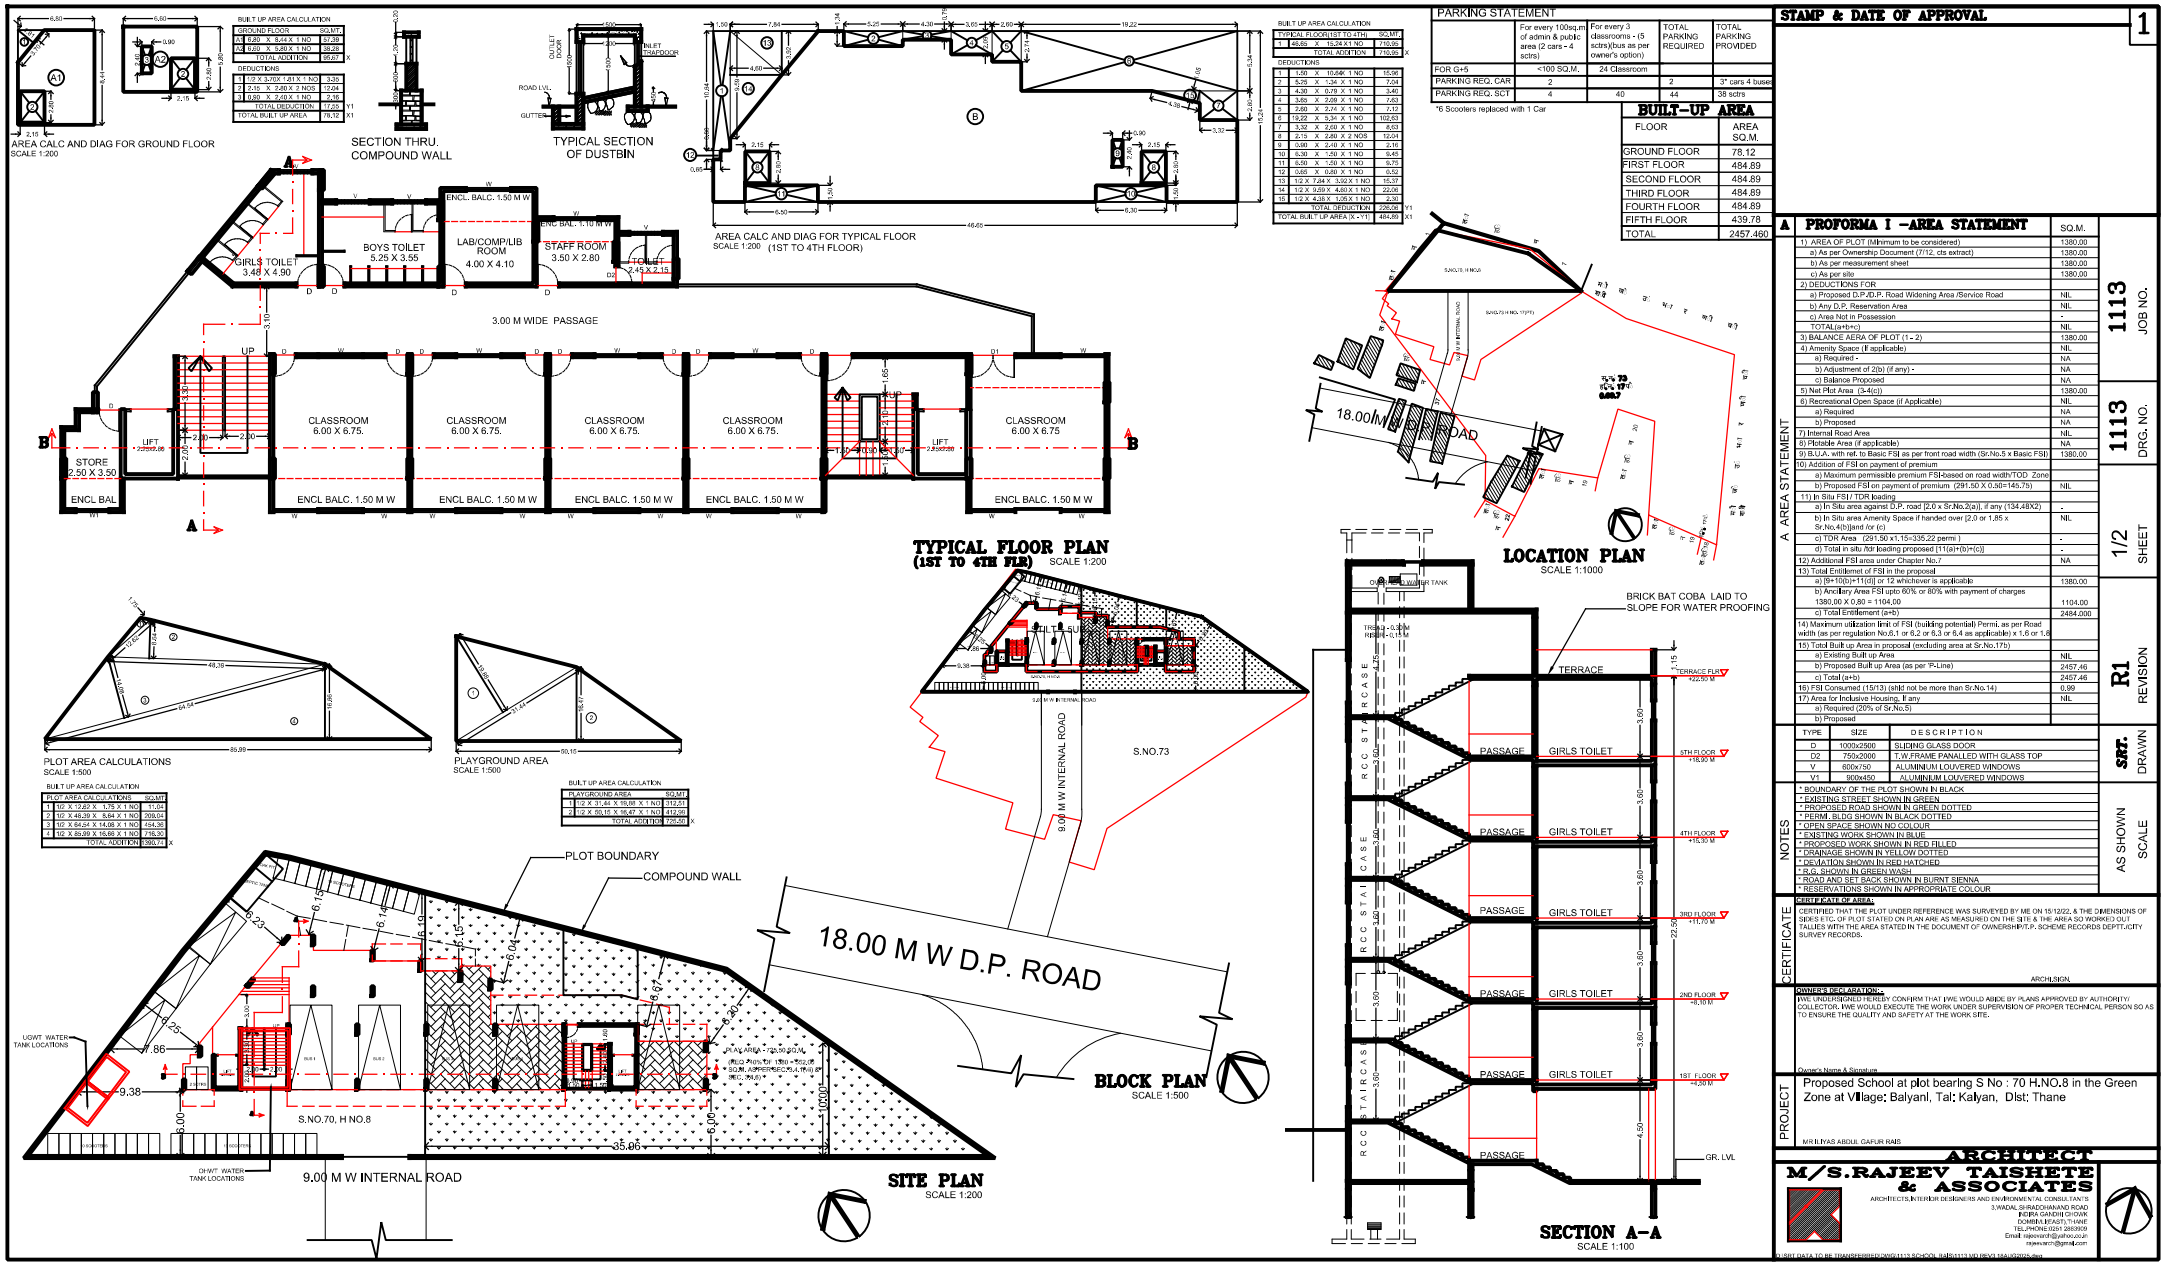

BUILT UP AREA CALCULATION

GROUND FLOOR				SQ.MT.
A1	8.80	X 8.44	X 1 NO	37.39
A2	9.60	X 2.60	X 1 NO	24.96
TOTAL ADDITION				62.35 X
DEDUCTIONS				
1	1.10	X 3.70X 1.01	X 1 NO	3.85
2	2.15	X 2.80	X 2 NOS	12.04
3	0.80	X 2.40	X 1 NO	2.16
TOTAL DEDUCTION				17.55 X1
TOTAL BUILT UP AREA				78.12 X1

BUILT UP AREA CALCULATION

TYPICAL FLOOR(1ST TO 4TH)				SQ.MT.
1	46.65	X	15.24 X 1 NO	710.95
TOTAL ADDITION				710.95 X
DEDUCTIONS				
1	1.50	X	10.64 X 1 NO	15.96
2	5.25	X	1.34 X 1 NO	7.04
3	4.20	X	0.79 X 1 NO	3.40
4	3.65	X	2.08 X 1 NO	7.60
5	2.60	X	2.74 X 1 NO	7.12
6	19.22	X	5.34 X 1 NO	102.63
7	3.32	X	2.60 X 1 NO	8.63
8	2.15	X	2.80 X 2 NOS	12.04
9	0.80	X	2.40 X 1 NO	2.16
10	6.30	X	1.50 X 1 NO	9.45
11	6.50	X	1.50 X 1 NO	9.75
12	0.65	X	0.80 X 1 NO	0.52
13	1/2 X	7.84 X	3.92 X 1 NO	15.37
14	1/2 X	9.69 X	4.85 X 1 NO	22.06
15	1/2 X	4.38 X	1.05 X 1 NO	2.30
TOTAL DEDUCTION				226.06 Y1
TOTAL BUILT UP AREA [X - Y1]				484.89 X1

PARKING STATEMENT

	For every 100sq.m of admin & public area (2 cars - 4 sctrs)	For every 3 classrooms - (5 sctrs)(bus as per owner's option)	TOTAL PARKING REQUIRED	TOTAL PARKING PROVIDED
FOR G+5	<100 SQ.M.	24 Classroom		
PARKING REQ. CAR	2		2	3* cars 4 buses
PARKING REQ. SCT	4	40	44	38 sctrs

*6 Scooters replaced with 1 Car

BUILT-UP AREA

FLOOR	AREA SQ.M.
GROUND FLOOR	78.12
FIRST FLOOR	484.89
SECOND FLOOR	484.89
THIRD FLOOR	484.89
FOURTH FLOOR	484.89
FIFTH FLOOR	439.78
TOTAL	2457.460

BUILT UP AREA CALCULATION

PLOT AREA CALCULATIONS				SQ.MT.
1	1/2 X	17.69 X	1.75 X 1 NO	11.04
2	1/2 X	48.39 X	8.64 X 1 NO	209.04
3	1/2 X	64.54 X	14.08 X 1 NO	454.36
4	1/2 X	85.39 X	18.66 X 1 NO	796.30
TOTAL ADDITION				1470.74 X

BUILT UP AREA CALCULATION

PLAYGROUND AREA				SQ.MT.
1	1/2 X	31.44 X	19.08 X 1 NO	312.21
2	1/2 X	89.16 X	18.47 X 1 NO	412.99
TOTAL ADDITION				725.20 X

STAMP & DATE OF APPROVAL

1

A PROFORMA I –AREA STATEMENT

	SQ.M.
1) AREA OF PLOT (Minimum to be considered)	1380.00
a) As per Ownership Document (7/12, cts extract)	1380.00
b) As per measurement sheet	1380.00
c) As per site	1380.00
2) DEDUCTIONS FOR	
a) Proposed D.P./D.P. Road Widening Area /Service Road	NIL
b) Any D.P. Reservation Area	NIL
c) Area Not in Possession	-
TOTAL(a+b+c)	NIL
3) BALANCE AERA OF PLOT (1 – 2)	1380.00
4) Amenity Space (If applicable)	NIL
a) Required -	NA
b) Adjustment of 2(b) (if any) -	NA
c) Balance Proposed	NA
5) Net Plot Area (3-4(c))	1380.00
6) Recreational Open Space (if Applicable)	NIL
a) Required	NA
b) Proposed	NA
7) Internal Road Area	NIL
8) Plotable Area (if applicable)	NA
9) B.U.A. with ref. to Basic FSI as per front road width (Sr.No.5 x Basic FSI)	1380.00
10) Addition of FSI on payment of premium	
a) Maximum permissible premium FSI-based on road width/TOD Zone	
b) Proposed FSI on payment of premium (291.50 X 0.50=145.75)	NIL
11) In Situ FSI / TDR loading	
a) In Situ area against D.P. road [2.0 x Sr.No.2(a)], if any (134.48X2)	-
b) In Situ area Amenity Space if handed over [2.0 or 1.85 x Sr.No.4(b)]and /or (c)	NIL
c) TDR Area (291.50 x1.15=335.22 permi)	-
d) Total in situ /tdr loading proposed [11(a)+(b)+(c)]	-
12) Additional FSI area under Chapter No.7	NA
13) Total Entitlemet of FSI in the proposal	
a) [9+10(b)+11(d)] or 12 whichever is applicable	1380.00
b) Ancillary Area FSI upto 60% or 80% with payment of charges 1380.00 X 0.80 = 1104.00	1104.00
c) Total Entitlement (a+b)	2484.000
14) Maximum utilization limit of FSI (building potential) Permi. as per Road width (as per regulation No.6.1 or 6.2 or 6.3 or 6.4 as applicable) x 1.5 or 1.8	
15) Total Built up Area in proposal (excluding area at Sr.No.17b)	
a) Existing Built up Area	NIL
b) Proposed Built up Area (as per 'P-Line)	2457.46
c) Total (a+b)	2457.46
16) FSI Consumed (15/13) (shld not be more than Sr.No.14)	0.99
17) Area for Inclusive Housing, If any	NIL
a) Required (20% of Sr.No.5)	
b) Proposed	

TYPE	SIZE	DESCRIPTION
D	1000x2500	SLIDING GLASS DOOR
D2	750x2000	T.W.FRAME PANALLED WITH GLASS TOP
V	600x750	ALUMINIUM LOUVERED WINDOWS
V1	900x450	ALUMINIUM LOUVERED WINDOWS

NOTES

* BOUNDARY OF THE PLOT SHOWN IN BLACK
* EXISTING STREET SHOWN IN GREEN
* PROPOSED ROAD SHOWN IN GREEN DOTTED
* PERM. BLDG SHOWN IN BLACK DOTTED
* OPEN SPACE SHOWN NO COLOUR
* EXISTING WORK SHOWN IN BLUE
* PROPOSED WORK SHOWN IN RED FILLED
* DRAINAGE SHOWN IN YELLOW DOTTED
* DEVIATION SHOWN IN RED HATCHED
* R.G. SHOWN IN GREEN WASH
* ROAD AND SET BACK SHOWN IN BURNT SIENNA
* RESERVATIONS SHOWN IN APPROPRIATE COLOUR

CERTIFICATE OF AREA:

CERTIFIED THAT THE PLOT UNDER REFERENCE WAS SURVEYED BY ME ON 15/12/22, & THE DIMENSIONS OF SIDES ETC. OF PLOT STATED ON PLAN ARE AS MEASURED ON THE SITE & THE AREA SO WORKED OUT TALLIES WITH THE AREA STATED IN THE DOCUMENT OF OWNERSHIP/T.P. SCHEME RECORDS DEPTT.,CITY SURVEY RECORDS.

ARCHUSIGN.

OWNER'S DECLARATION:-

I/WE UNDERSIGNED HEREBY CONFIRM THAT I/WE WOULD ABIDE BY PLANS APPROVED BY AUTHORITY/ COLLECTOR. I/WE WOULD EXECUTE THE WORK UNDER SUPERVISION OF PROPER TECHNICAL PERSON SO AS TO ENSURE THE QUALITY AND SAFETY AT THE WORK SITE.

Owner's Name & Signature

PROJECT

Proposed School at plot bearing S No : 70 H.NO.8 in the Green Zone at Village: Balyanl, Tal: Kalyan, Dist: Thane

MR.ILIYAS ABDUL GAFUR RAIS

ARCHITECT

M/S.RAJEEV TAISHETE & ASSOCIATES

ARCHITECTS,INTERIOR DESIGNERS AND ENVIRONMENTAL CONSULTANTS
3,WADAL,SIRADCHAMAND ROAD
INDIRA GANDHI CHOWK
DOMBIVLI (EAST),THANE
TEL.PHONE:0251 2883909
Email: rajeevarch@yahoo.co.in
rajeevarch@gmail.com

1113	JOB NO.
1113	DRG. NO.
1/2	SHEET
R1	REVISION
SKT.	DRAWN
AS SHOWN	SCALE

A. AREA STATEMENT

CERTIFICATE

NOTES

PROJECT

1:\SIRI DATA TO BE TRANSFERRED\2022\1113 SCHOOL RAIS\1113 MD REV1 18JUL\02725.dwg