OFFICE OF THE KALYAN DOMBIVLI MUNICIPAL CORPORATION, KALYAN.
Building Permit No. :- KDMC/TPD/BP/27/Village/2020-21/16/145
Date :- 13/11/2024
SANCTIONED

ASSISTANT DIRECTOR OF TOWN PLANNING
Kalyan-Dombivli Municipal Corporation

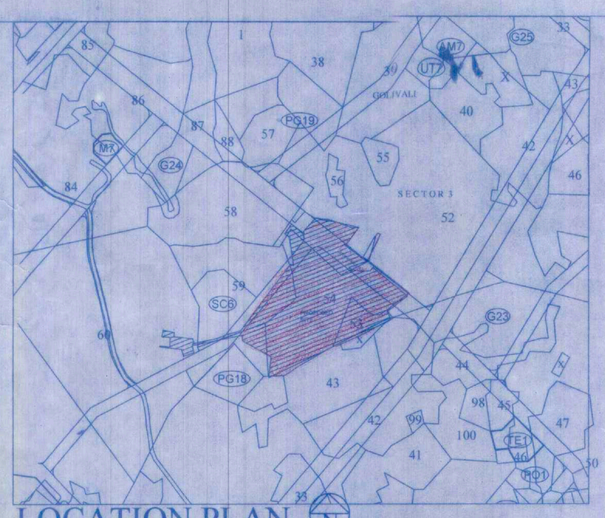

LOCATION PLAN

PLOT AREA STATEMENT	
S.NO	AS PER 7/12
54/1	8080
54/2	15800
53	3300
52/16	4887
60/1/C	3650
59/2(B)	3970
TOTAL	39687

PARKING STATEMENT			
FLAT CARPET AREA IN SQ.MT.	No. OF FLATS	REQUIRED CAR	REQUIRED SCOOTER
BELOW 30 SQ.MT. EVERY 2 TENEMENT=2SCOOTER			
30 TO 40 SQ.MT. EVERY 2 TENEMENT/1 CAR & 2 SCOOTER	-	-	-
40 TO 80 SQ.MT. EVERY 2 TENEMENT/1CAR & 2 SCOOTER	720	360	720
80 TO 150 SQ.MT. EVERY ONE TENEMENT/1 CAR & 1SCOOTER	480	480	480
150 SQ.MT & ABOVE EVERY ONE TENEMENT/2CAR&3 SCOOTER			
TOTAL NO OF RESIDENTIAL PARKING	1200	840	1200
ADD VISITOR PARKING FOR RESIDENTIAL 5%		42	60
COMMERCIAL AREA EVERY 100 SQ.MT/2 CAR & 5 SCOOTER	277S	56	167
ADD VISITOR PARKING FOR COMMERCIAL 25%			
TOTAL NO OF PARKING		938	1427
PARKING REQUIRED AS PER TABLE NO. 8(80% OF PARKING		751	1427
PARKING PROPOSED			
STILT PARKING		400	1000
E.S PODIUM & ECO DECK FLOOR PARKING		1071	
COMPOSITE PARKING FOR SCOOTER (427 / 6) = 71 NOS			
TOTAL PROPOSED NO OF PARKING		1471	1000

DOORS & WINDOWS SCHEDULE

	SIZE W.X H.	AREA IN SQ.MTS.	DESCRIPTION
D	1.20M. X 2.15M.	2.50	T.W.FLUSHED DOOR
D1	0.90M. X 2.15M.	1.93	T.W.PANELLED DOOR
D2	0.75M. X 2.00M.	1.50	—"—
W	2.45M. X 1.80M.	4.41	ALLUMINIUM SLIDING
W1	2.15M. X 1.80M.	3.87	ALLUMINIUM SLIDING
W2	1.55M. X 1.50M.	2.32	ALLUMINIUM SLIDING
W3	1.25M. X 1.80M.	2.25	ALLUMINIUM SLIDING
V	0.60M. X 0.90M.	0.54	ALLUMINIUM LOUVERS
RS			ROLLING SHUTTER

AMENITY AREA DIAGRAM
(SCALE 1:500)

AMENITY AREA CALCULATION			
1	1/2 X 61.78 X 1.22 X 1 NO	=	37.69 SQ.MT.
2	1/2 X 74.21 X 35.94 X 1 NO	=	1333.55 SQ.MT.
3	1/2 X 43.10 X 6.25 X 1 NO	=	134.97 SQ.MT.
	TOTAL ADDITION	=	1506.21 SQ.MT. X

R.G AREA DIAGRAM
ON PODIUM
(SCALE 1:500)

R.G.AREA CALCULATION			
RG ON PODIUM			
18	1/2 X 40.87 X 18.76 X 1 NO	=	383.36 SQ.MT.
18	1/2 X 70.58 X 15.05 X 1 NO	=	531.11 SQ.MT.
19	1/2 X 77.84 X 43.09 X 1 NO	=	1677.06 SQ.MT.
20	1/2 X 43.62 X 6.38 X 1 NO	=	139.15 SQ.MT.
22	1/2 X 20.59 X 5.61 X 1 NO	=	57.75 SQ.MT.
23	2/3 X 17.01 X 7.54 X 1 NO	=	85.50 SQ.MT.
24	2/3 X 7.16 X 1.33 X 1 NO	=	6.35 SQ.MT.
	TOTAL ADDITION	=	2880.15 SQ.MT. X

FORM OF STATEMENT 3
AREA DETAILS OF SHOP
COMMERCIAL BLDG. NO. 1
GROUND FLOOR

SHOP NO.	AREA
1	41.83
2	40.93
3	35.91
4	35.91
5	35.91
6	35.91
7	35.91
8	40.68
9	40.69
10	32.62
11	39.52
12	34.79
13	29.94
14	33.42
15	33.42
16	29.93
17	33.17
18	33.17
19	32.62
20	29.93
21	33.42
22	33.47
23	35.48
24	29.96
25	34.80
26	38.02
27	34.81
28	33.17
29	33.17
30	33.17
31	33.17
32 +33+34	167.25
35	33.15
36	33.17
37	33.15
38	33.15
39	33.15
40	33.17
41	33.18
42	33.21
43	33.18
44	39.52
45	34.79
46	29.94
47	33.42
48	33.42
49	29.93
50	32.62
51	33.17
52	33.17
53	32.62
54	29.93
55	33.42
56	33.47
57	29.96
58	34.80
59	38.02
60	33.17
FIRST FLOOR SHOP NO 32+33+34	144.08

FORM OF STATEMENT 3
AREA DETAILS OF SHOP
COMMERCIAL BLDG. NO. 2

FLOOR	AREA
GROUND	173.78
1ST	173.78
2ND	173.78

FORM OF STATEMENT - 2
PROPOSED BUILT UP AREA STATEMENT (IN SQ.MT.)

BLDG. NOS	FLOOR	FLOOR AREA	TOTAL AREA	NO OF BLDG.	TOTAL AREA
A	GROUND + 2	GROUND FLOOR - 187.54 1ST FLOOR -334.85 2ND FLOOR -285.89	O.C OBTAINED AREA IN PROPOSED 30.56	1	O.C OBTAINED AREA IN PROPOSED 30.56
1,2 & 5	STILT + 2 PODIUM + ECO DECK FLOOR + 30 FLOORS	STILT FLOOR - 92.86 1ST&2ND PODIUM- 54.40 ECO DECK FLOOR-75.90 TYP. FLR.=1014.11	30700.86	3	92102.58
3	STILT + 2 PODIUM + ECO DECK FLOOR + 30 FLOOR	STILT FLOOR - 94.92 1ST&2ND PODIUM-58.58 ECO DECKFLOOR-81.31 TYP. FLR.=805.76	24466.19	1	24466.19
4	STILT + 2 PODIUM + ECO DECK FLOOR + 30FLOORS	STILT FLOOR = 96.50 1ST&2ND PODIUM-64.64 ECO DECKFLOOR-115.06 1ST TO 30 FLR.=1009.48	30625.24	1	30625.24
COMMERCIAL BLDG. 1	GROUND +1(PT)	GR. FLOOR =1895.31 1ST. FLOOR - 208.57	2103.88	1	2103.88
CLUB HOUSE	STILT+ 1ST & 2ND PODIUM +ECO DECK FLOOR +3 FLOORS	GR. COMMERCIAL - 322.09 GROUND - 259.04 1ST. PODIUM.- 581.61 2ND. PODIUM.- 139.38 ECO DECK FLR.-602.35 1ST FLR.- 585.91 2ND FLR.=587.48 3RD FLR.-601.26	3679.12	1	3679.12
COMMERCIAL BLDG.-2	GROUND +2	GROUND -201.23 1ST& 2ND. - 201.23	603.69	1	603.69
TOTAL				9	154424.54

LAYOUT PLAN — SHEET NO 1/13

STAMP OF APPROVAL OF PLAN

A. AREA STATEMENT

1	A)	AREA OF PLOT	
	a)	As per ownership document (7/12,cts extract) 35717.00 + 3970.00	39687.00
	b)	As per measurement sheet	
	c)	As per site	38269.00
2		DEDUCTIONS FOR	
	a)	PROPOSED 18.00M & 30.00M W. D.P. ROAD	8200.00
	b)	S.C. 6 RESERVATION AREA	20.00
	c)	Area under Nala	645.82
		TOTAL (a TO b)	8865.82
3		BALANCE AREA OF PLOT (1 Minus 2)	29403.18
4		AMMENITY SPACE IF APPLICABLE	
		a) REQUIRED 5% (29403.18 X 0.5)	1470.16
		b) ADJUSTMENT OF IF ANY	
		c) PROPOSED	1505.16
5		NET Pl. OF AREA (3-4(c))	27933.02
6		RECREATIONAL OPEN SPACE	
		a) REQUIRED 10%	2793.30
		b) PROPOSED 100% RG ON GROUND = 2794.00 SQ.MT. + ADDITIONAL RG PROPOSED ON PODIUM 2880.50 SQ.MT.	2794.00
7		INTERNAL ROAD AREA	0.00
8		PLOTABLE AREA	0.00
9		BUILT UP AREA WITH REFERANCE TO BASIC FSI AS PER FRONT ROAD WIDTH (30.00+33.00)X(FSI) (27933.02 X 1.10)	30726.32
10		ADDITION OF FSI ON PAYMENT PREMIUM	
		a) MAXIMUM PERMISSIBLE PREMIUM FSI BASED ON ROAD WIDTH /TOD ZONE	19134.50
		b) PROPOSED FSI ON PAYMENT OF PREMIUM 38269.00 X 0.5 = 19134.50	17583.50
11		IN-SITU FSI/TDR LOADING	
		a) IN-SITU AREA AGAINST D.P. ROAD 92.0 SR NO.2 (a) 7050.00 X 2.05 = 14452.50 (AS PER PREVIOUS SANCTION) 1150.00 X 2.00 = 2300.00 (AS PER PREVIOUS SANCTION) 645.82 X 1.00 = 645.82 (AS PER PREVIOUS SANCTION)	16752.50 645.82
		b) IN-SITU AREA AGAINST AMENITY SPACE IF HANDED OVER 1505.16 X 2.00 = 3010.32(AS PER PREVIOUS SANCTION) (2.00 OR 1.85 X SR. NO.4 (B) AND / or (C)	3010.32
		c) TDR AREA 38269.00 x 1.40 = 53576.60 - (17398.32 + 3010.32)= 33167.96 OUT OF THIS	SANCTION TDR 14618.53 PROPOSED TDR 14033.85
		d) TOTAL IN-SITU / TDR LOADING PROPOSED (11 (a)+(b)+(c)	49061.85
12		ADDITIONAL FSI AREA UNDER CHAPTER NO.7	-
13		TOTAL ENTIFLEMENT OF FSI IN THE (ZOP/OSAL	
		a) (9+10 (b)+11(d) or 12 WHICHEVER IS APPLICABLE	97370.85
		b) ANCILLARY AREA FSI UPTO 60% OR 80% WITH PAYMENT OF CHARGES COMMERCIAL AREA 1683.14 X 80% = 1346.73 RESIDENTIAL AREA 956877.71 X 60%= 57412.63 58759.36 OUT OF THIS PREVIOUS APPROVED = 48550.00 + PROPOSED 8505.00	57055.00
		c) TOTAL ENTITLEMENT (a+b)	154425.85
14		MAXIMUM UTILISATION LIMIT OF FSI (BUILDING POTENTIAL) PERMISSIBLE AS PER ROAD WIDTH (As per Regulation no. 6.1 or 6.2 or 6.3 or 6.4 as applicable) x 1.6 or 1.8	
15		TOTAL BUILT UP AREA IN PROPOSAL (EXCLUDING AREA AT SR. NO.17(b)	
		a) EXISTING AREA = 808.28 (O.C OBTAINED AREA) b) PREVIOUS APPROVAL AREA 131076.20 + PROPOSED AREA 22540.06 = 153616.26 c) TOTAL (a+b)	808.28 153616.26 154424.54
16		FSI CONSUMED (15/13)	
17		AREA FOR INCLUSIVE HOUSING IF ANY (a) REQUIRED (20% OF SR. NO. 9) (30726.32 X 20%) = 6145.26 PROPOSED INCLUSIVE HOUSING BLDG SHOWN IN S.NO. 52/13B AT VILLAGE GOLAVLI	6145.26 6185.01
		(b) PROPOSED (20% OF SR. NO. 5)	6185.01

LEGENDS
PLOT BOUNDARY SHOWN IN THICK BLACK
EXISTING STREET SHOWN IN GREEN
FUTURE STREET GREEN DOTTED
PERMISSIBLE BUILDING SHOWN IN THICK DOTTED BLACK
EXISTING WORK SHOWN IN BLUE
WORK PROPOSED TO BE DEMOLISHED SHOWN IN YELLOW HATCHED
PROPOSED WORK SHOWN IN RED
DRAINAGE & SEVERAGE WORK SHOWN IN RED DOTTED
WATER SUPPLY WORK SHOWN IN BLACK DOTTED THIN

NOTES
DRAWING IN SCALE
ALL DIMENSIONS ARE IN METERS
OUTER WALL & INTERNAL WALL 0.15M THK

OWNER'S DECLARATION
I WE UNDER SIGNED HEREBY CONFIRM THAT I WE WOULD ABIDE BY PLANS APPROVED BY AUTHORITY ,COLLECTOR. I WE WOULD EXECUTE THE STRUCTURE AS PER APPROVED PLANS. ALSO I WE WOULD EXECUTE THE WORK UNDER SUPERVISION OF TECHNICAL PERSON SO AS TO ENSURE THE QUALITY AND SAFETY AT THE WORK SITE.

OWNER'S NAME AND SIGNATURE

APPENDIX - C
THE PLANS PREPARED BY ME ARE IN ACCORDANCE WITH THE NORMS AS SPECIFIED BY INDIAN STANDARD INSTITUTE & WILL BE HELD RESPONSIBLE FOR ANY HARM CAUSED IN EARTHQUAKE DUE TO NEGLIGENCE THE STANDARDS

R.C.C ENGINEER'S SIGNATURE

CERTIFICATE OF AREA
CERTIFICATE THAT THE PLOT UNDER REFERANCE WAS SURVEYED BY ME ON ---- AND THAT THE DIMENSIONS OF THE SIDES ETC. OF THE PLOT STATED ON THE PLAN ARE AS MEASURED ON SITE AND THE AREA SO WORKED AND TALLIES WITH THE AREA STATED IN THE DOCUMENT OF OWNERSHIP
TOWN PLANNING SCHEME RECORDS / ASSESSMENT RECORDS DEPARTMENT/CTS/ SURVEY RECORDS

VISHWA J. W CONSULTANTS

SIGNATURE OF ARCHITECT

ARCHITECT AND ENGINEER — TEJAS A.NIRGUDE. — SIGNATURE OF OWNERS.

856.01 DRG. NO.	PROPOSED BLDG. ON PLOT BEARING S.NO.54/1,54/2,53,52/16,60/1C 59/2(p)AT VILLAGE GOLAVLI TALUKA-KALYAN,DIST:THANE FOR, OWNERS M/s. REGENCY NIRMAN LTD.
AS SHOWN SCALE	
14/09/2024 DATE	WARD=1 WARD NO.=9 27 VILLAGES
ANIL CHD. BY.	VITAN CONSULTANTS ARCHITECTS & ENGINNIERS 5TH FLOOR ,MIDTOWN EMBASSY ,OPP. NARAYANA TECHNO SCHOOL, BEHIND VASANT VALLEY BUS DEPOT, GANDHARE KALYAN WEST 421301
KRISHNAN CAD/DRN	

RERA AREA DETAILS OF APARTMENT

BLDG.	FLOOR NO	APARTMENT/ SHOP/OFFICE NO.		CARPET AREA OF APARTMENT (IN SQ.M)	AREA OF BALCONY ATTACHED TO APARTMENT (ENCLOSED BALCONY) (IN SQ.M)	AREA OF BALCONY ATTACHED TO APARTMENT (OPEN BALCONY) (IN SQ.M)
1,2 & 5	1ST TO 30TH FLR.	FLAT	1	69.90	----	9.62
		FLAT	2	100.15	----	10.62
		FLAT	3	105.82	----	10.55
		FLAT	4	75.39	----	9.87
		FLAT	5	75.39	----	9.87
		FLAT	6	105.82	----	10.55
		FLAT	7	100.15	----	10.62
		FLAT	8	69.90	----	9.62
3	1ST TO 30TH FLR.	FLAT	1	66.69	----	9.73
		FLAT	2	66.69	----	9.73
		FLAT	3	67.63	----	9.73
		FLAT	4	67.29	----	9.58
		FLAT	5	67.29	----	9.58
		FLAT	6	67.63	----	9.73
		FLAT	7	66.69	----	9.73
		FLAT	8	66.69	----	9.73
4	1ST TO 30TH FLR.	FLAT	1	69.97	----	11.79
		FLAT	2	100.15	----	15.74
		FLAT	3	105.82	----	15.67
		FLAT	4	74.86	----	11.84
		FLAT	5	74.86	----	11.84
		FLAT	6	105.82	----	15.67
		FLAT	7	100.15	----	15.74
		FLAT	8	69.97	----	11.79

R.G.-- 1 AREA CALCULATION			
TYPICAL FLOOR			
A	1/2 X 21.03 X 8.75 X 1 NO	=	92.01 SQ.MT.
B	1/2 X 21.03 X 8.51 X 1 NO	=	89.48 SQ.MT.
C	1/2 X 18.17 X 1.42 X 1 NO	=	12.90 SQ.MT.
D	1/2 X 23.01 X 5.41 X 1 NO	=	62.24 SQ.MT.
E	1/2 X 7.63 X 1.75 X 1 NO	=	6.85 SQ.MT.
F	1/2 X 29.02 X 17.58 X 1 NO	=	255.09 SQ.MT.
G	1/2 X 24.96 X 4.72 X 1 NO	=	58.91 SQ.MT.
H	1/2 X 24.96 X 11.85 X 1 NO	=	147.89 SQ.MT.
I	1/2 X 9.52 X 3.36 X 1 NO	=	15.99 SQ.MT.
J	1/2 X 17.10 X 8.35 X 1 NO	=	71.39 SQ.MT.
K	1/2 X 15.04 X 8.26 X 1 NO	=	62.12 SQ.MT.
	TOTAL ADDITION	=	874.87 SQ.MT. X

R.G.-- 2 AREA CALCULATION			
TYPICAL FLOOR			
A	1/2 X 29.31 X 15.09 X 1 NO	=	221.14 SQ.MT.
	TOTAL ADDITION	=	221.14 SQ.MT. X

R.G.--3 AREA CALCULATION			
R.G. ON GROUND			
1	1/2 X 13.81 X 7.05 X 1 NO	=	48.68 SQ.MT.
2	1/2 X 16.98 X 8.37 X 1 NO	=	71.06 SQ.MT.
3	1/2 X 24.98 X 4.60 X 1 NO	=	61.15 SQ.MT.
4	1/2 X 25.08 X 1.69 X 1 NO	=	21.19 SQ.MT.
	TOTAL ADDITION	=	202.08 SQ.MT.

R.G. -- 4 AREA CALCULATION			
1	1/2 X 23.23 X 4.07 X 1 NO	=	47.27 SQ.MT.
2	1/2 X 47.71 X 4.21 X 1 NO	=	100.43 SQ.MT.
3	1/2 X 47.71 X 22.14 X 1 NO	=	528.15 SQ.MT.
4	2/3 X 5.81 X 1.56 X 1 NO	=	6.04 SQ.MT.
	TOTAL ADDITION	=	681.89 SQ.MT. X

R.G. -- 5 AREA CALCULATION			
1	1/2 X 7.58 X 4.81 X 1 NO	=	18.23 SQ.MT.
2	1/2 X 55.40 X 2.17 X 1 NO	=	60.11 SQ.MT.
3	1/2 X 52.51 X 20.63 X 1 NO	=	541.64 SQ.MT.
4	1/2 X 29.56 X 3.10 X 1 NO	=	45.82 SQ.MT.
5	1/2 X 77.62 X 3.82 X 1 NO	=	148.25 SQ.MT.
	TOTAL ADDITION	=	814.05 SQ.MT. X

TOTAL R.G. AREA ON GROUND = 874.87 + 221.14+ 202.08 + 681.89 + 814.05 = 2794.03 SQ.MT.

1) AREA OF PLOT ON PLOT BEARING S.NO. 54/1,54/2,53,52/16 & 60/1C = 40437.00 SQ.MT.
AT VILLAGE: GOLAVLI, TALUKA: KALYAN DIST THANE
2) NET AREA OF PLOT = 27933.02 SQ.MT.
3) BASIC F.S.I 27933.02 X 1.10 = 30726.32 SQ.MT.
4) INCLUSIVE HOUSING BUILDING REQUIRED 30726.32 X 20% = 6145.26 SQ.MT.
5) PROPOSED INCLUSIVE HOUSING BLDG SHOWN IN S.NO. 52/13B = 6185.01 SQ.MT.
AT VILLAGE: GOLAVLI, TALUKA KALYAN DIST: THANE
(STILT + 11 FLOORS ONLY)